

nonut® 10.6



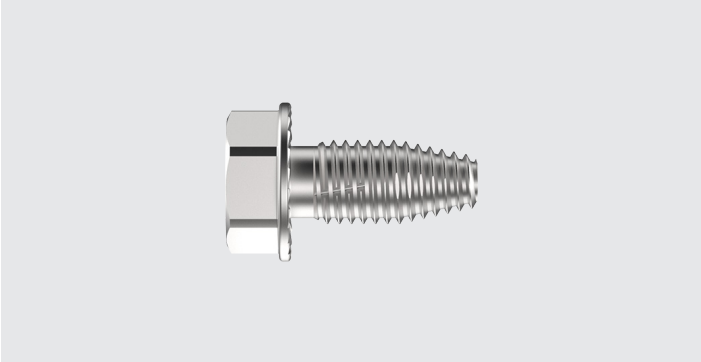

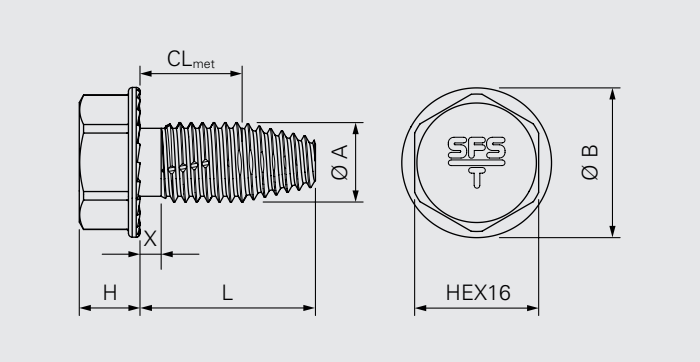

Description

Self-tapping fastener made of carbon steel with conical thread inlet

Application

Structural connections of metal profiles

Component 1 (t_I)		Component 2 (t_{II})	
Steel	see ETA 11/0191	Steel	see ETA 11/0191

Fastener material

Carbon steel, hardened, Durocoat® 480


Approvals

CE 11
ETA-11/0191

Features and Benefits

- Simple one side installation as no nut is required
- Fastener designed for high technical values in the application
- Fast and user friendly installation with impact gun
- Centering of the pre-punched metal profiles by conical thread inlet
- Patented thread design for optimized thread forming capability
- Highest safety regarding overwinding and self-loosening


All measures in mm

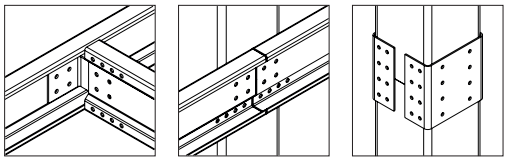

Fastener in carbon steel onto steel

Product code	PU	L	CL_{met}	Head	Ø A	Ø B	×	H	
nonut®-TDBL-T-10,6×23	100	23	0–13	HEX16	10.6	20.0	3.0	8	1542223
nonut®-TDBLF-T-10,6×23							<1.50		1542229
nonut®-TDBL-T-10,6×30		30	0–20				3.0		1542217
nonut®-TDBL-T-10,6×50		50	0–40						1561761

Please refer to the "Definition of clamping range and fixing thickness" in the technical introduction for definitions and diagrams related to $CL_{met.}$

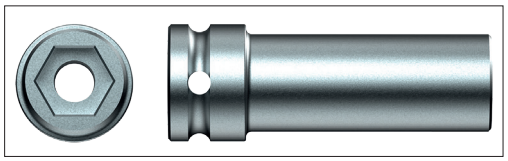

Accessories

Product code	PU	Insert drive	Recess	L	
Socket E416-½"-40	1	HEX½"	HEX16	40	1389740
Socket E516-½"-78 red.				78	1649257
Socket E516-½"-78					1649256

SFS Group Fastening Technology Ltd | 153 Kirkstall Road | Leeds LS4 2AT | ukenquiries@sfs.com | uk.sfs.com

All information is non-binding and without guarantee. Before using the products, all specifications and calculations must be checked by a suitably qualified person and local regulations must be observed. This document is subject to revision. We reserve the right to make technical changes.

© SFS, 10/2024, TD_nonut_TDBL_10,6_en_GB-Lds, V1